DOMINATORPLUS

GAS GENERAL PURPOSE OVEN RANGES





MODELS and ACCESSORIES

G3101 Six burner range - general purpose ovenG3161 Four burner range - general purpose ovenG3107 Single bullseye range - general purpose oven

- Fully integrated extended flue
- Splashplate and plateshelf (not for use with extended flue)
- Oven shelf
- Lift-off fryplate
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

KEY FEATURES

- Energy efficient, high performance 5.8kW burners - Quick heat up, reduced waiting time
- Semi-sealed, pressed stainless steel hob - Easy to remove and keep clean
- Individual cast iron pan supports on open top units
 Long-lasting and robust
- Chefs' solid top model has removable bullseye - Delivers heat where required, up to 400°C
- Vitreous enamelled oven chamber - Easy to clean and to keep clean
- Wide oven temperature range of 120 270°C
 Ideal to prepare a wide variety of food
- Piezo ignition to oven
 Simple, trouble-free operation
- 900mm units have twin doors with individual catches Retains heat within the oven chamber
- Oven has 5 shelf positions and allows 2 shelf cooking
 Versatile, ideal for a wide range of menu items
- Low profile door handles
 Reduces intrusion into work space
- Laser-etched control icons - Permanent, indelible markings

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATORPLUS

GAS GENERAL PURPOSE OVEN RANGES

MODEL DIMENSIONS (in mm)

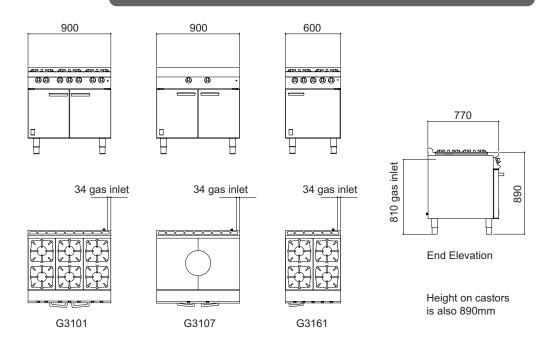

SPECIFICATION DETAILS

G3101	G3107	G3161
38.7	17.3	25.9
147,000	65,500	98,100
3/4" BSP	3/4" BSP	3/4" BSP
4.10	1.83	2.70
2.90	1.34	1.90
20 / 37	20 / 37	20 / 37
15 / 37	15 / 37	15 / 37
5.8 x 6	11.2	5.8 x 4
20,000 x 6	38,500	20,000 x 4
7.2	7.1	5.3
27,000	27,000	18,100
700 x 535 x 430	700 x 535 x 430	400 x 535 x 430
700 x 535	700 x 535	400 x 535
2/1	2/1	1/1
114	137	88
122	145	94
	38.7 147,000 3/4" BSP 4.10 2.90 20 / 37 15 / 37 5.8 x 6 20,000 x 6 7.2 27,000 700 x 535 x 430 700 x 535 2/1 114	38.717.3147,00065,5003/4" BSP3/4" BSP4.101.832.901.3420 / 3720 / 3715 / 3715 / 375.8 x 611.220,000 x 638,5007.27.127,00027,000700 x 535 x 430700 x 535 x 430700 x 5352/1114137