

## Opus 700 Ranges

### Key Features

- Type: Dual fuel (gas hob, electric oven)
- Dual concentric hob burners (manual ignition)
- Fully sealed hob top
- Individual pan supports
- Low level rear flue
- Electric fan assisted oven with thermostatic control (130 – 265 °C)
- Removable oven base, sides and top liners
- Five shelf positions
- Side-hinged oven doors (180° opening)
- Supplied with three shelves
- Supplied with Piezo ignitor wand
- Supplied on castors



on7007

### Construction

- Body: stainless steel grade 430
- Hob top: stainless steel grade 304
- Pan supports: matt enamelled cast iron
- Oven liner: enamelled steel
- Chrome plated shelves

### Available Options


- Natural gas
- Propane gas
- Butane gas
- Adjustable legs
- Choice of four or six burners

### Available Accessories

- OA7901– Splashback/plate shelf for model OD7006
- OA7902– Splashback/plate shelf for model OD7007
- OA7903 – Drop on aluminium griddle plate

## Specifications

Model	OD7006	OD7007
External height (mm)	925 - 980	925 - 980
External width (mm)	600	900
External depth (mm)	815	815
External depth excluding doors (mm)	810	810
Usable oven capacity h x w x d (mm)	400 x 500 x 540	400 x 715 x 540
Oven shelf size w x d (mm)	480 x 530	770 x 530
Net weight unpacked (kg)	155	186
Gross weight packed (kg)	167	201
Shipping volume (m <sup>3</sup> )	0.624	0.880
Oven	Electric single-fan	Electric twin-fan
Hob	4 gas open burners	6 gas open burners
Oven rating (kW)	4.0	4.0
Total electrical power rating (kW)	6.0	6.0
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	17.5	26.4
Electrical supply 3N~+E 400V 50-60Hz Current Rating (A)	L1-8.8 L2-8.7 L3-0.0	L1-9 L2-8.7 L3-8.7
Heat input per burner Natural (kW)	5.5	5.5
Heat input per burner Propane (kW)	5.1	5.1
Heat input per burner Butane (kW)	5.1	5.1
Total heat input Natural (kW)	22.0	33.0
Total heat input Propane (kW)	20.4	30.6
Total heat input Butane (kW)	20.4	30.6
Gas consumption at full rate Natural (m <sup>3</sup> h <sup>-1</sup> )	2.1	3.14
Gas consumption at full rate Propane (kg h <sup>-1</sup> )	1.46	2.19
Gas consumption at full rate Butane (kg h <sup>-1</sup> )	1.48	2.23
Gas inlet	G ½ female	
Btu/h conversion	kW x 3412	

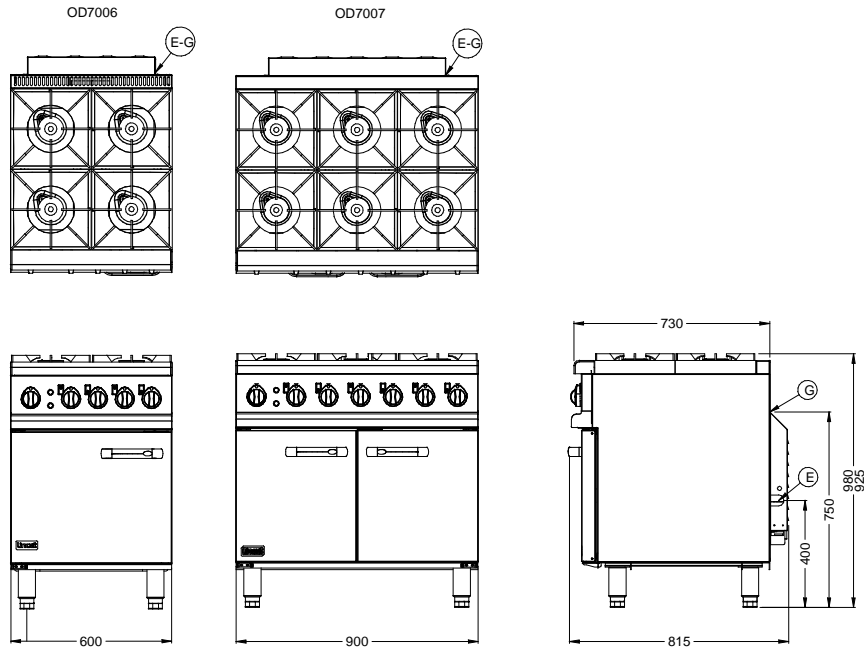

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
 Website: [www.lincat.co.uk](http://www.lincat.co.uk) UK Sales e-mail: [sales@lincat.co.uk](mailto:sales@lincat.co.uk) International Sales e-mail: [export@lincat.co.uk](mailto:export@lincat.co.uk)



Document ref:  
OPUSDUALFUEL  
Issue date: Oct-09